
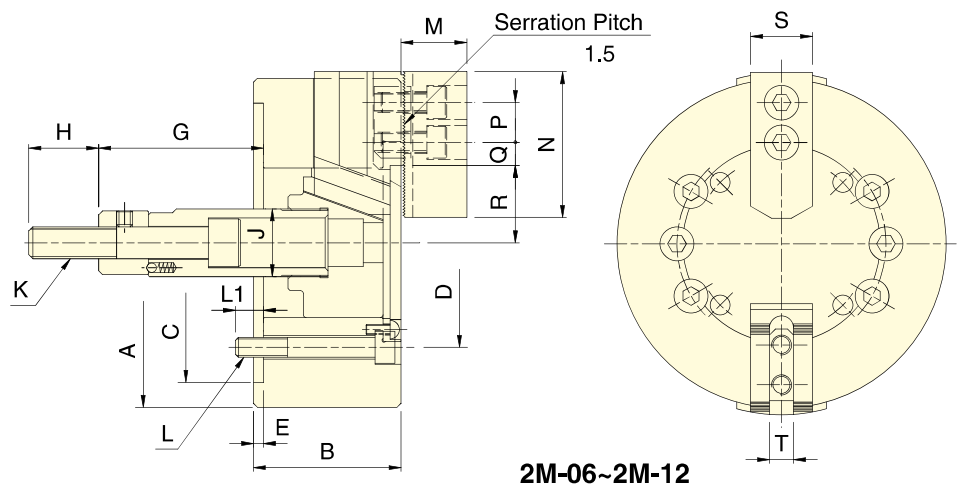


LONG JAW STROKE POWER CHUCK

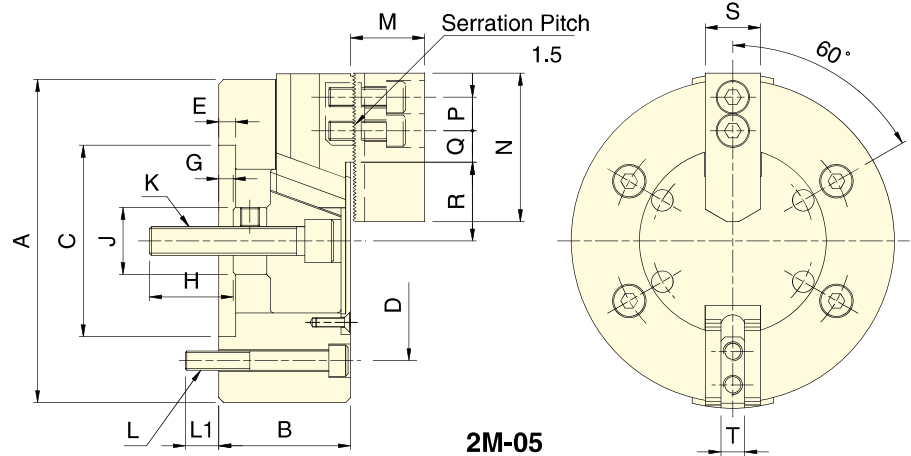

Subject to technical changes.

Spec. Model	Plunger stroke mm	Jaw stroke(Dia.) mm	Chucking Dia.mm		Max. D.B. pull kN(kgf)	Max. clamping force kN(kgf)	Max. speed min ⁻¹ (r.p.m)	I kg·m ²	Weight kg	Matching cyl.	Max. pressure Mpa (kgf/cm ²)	
			Max.	Min.								
2M-05	15	10.9	135	14	6.5(660)	11 (1120)	4500	0.02	6.0	RK-75(N)	1.8(18)	
2M-06	20	14.5	165		14.3(1460)	24 (2450)	4000	0.04	12.2	RK-100(N)	2.0(20)	
2M-08	23	16.7	210	17	19.6(2000)	36.6 (3730)	3500	0.13	23.0	RK-125(N)	1.9(19.3)	
2M-10	27	19.6	254	22	26.1(2660)	49.3 (5030)	3000	0.30	34.3	RK-150(N)	1.8(18.6)	
2M-12	30	21.8	304	26	36(3670)	66(6730)	2500	0.71	59.1		2.4(24)	
Size Model	A	B	C (H6)		D	E	G max.		G min.	H	J	
2M-05	135	55	80		100	7	6		-9	35	28	
2M-06	165	74	140		104.8	5	101.5		81.5	36	34	
2M-08	210	85	170		133.4		129		106		38	
2M-10	254	89	220	171.4	160		133	45				
2M-12	304	106					6	70	40	46	50	
Size Model	K	L	L1	M	N	P	Q max.	Q min.	R max.	R min.	S	T
2M-05	M12x1.75	4~M8	14	31	62	14	17.0	5.5	32.9	27.45	25	10
2M-06	M16x2	6~M10		37	73	20	17.6	7.0	38.7	31.4	31	12
2M-08	M20x2.5	6~M12	20	38	95	25	22.8	8.8	47.5	39.1	35	14
2M-10		6~M16	18	43	110	30	33.0	12.8	53.9	44.1	40	16
2M-12	M24x3			51	130		47.8	13.3	62.5	51.6	50	21