



EXPANSIBLE PULL LOCK POWER CHUCK

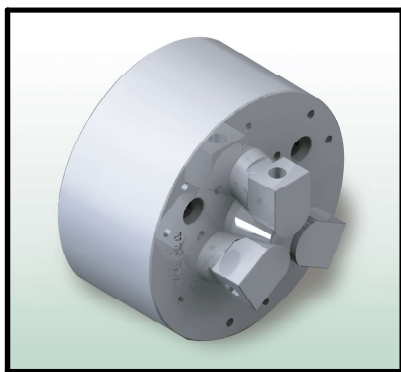

- It's a Expansible Pull Lock type 3-jaw Non-thru-hole power chuck.
- Pull back suitable for gripping.
- With high precision and stability that chuck suitable for end process.

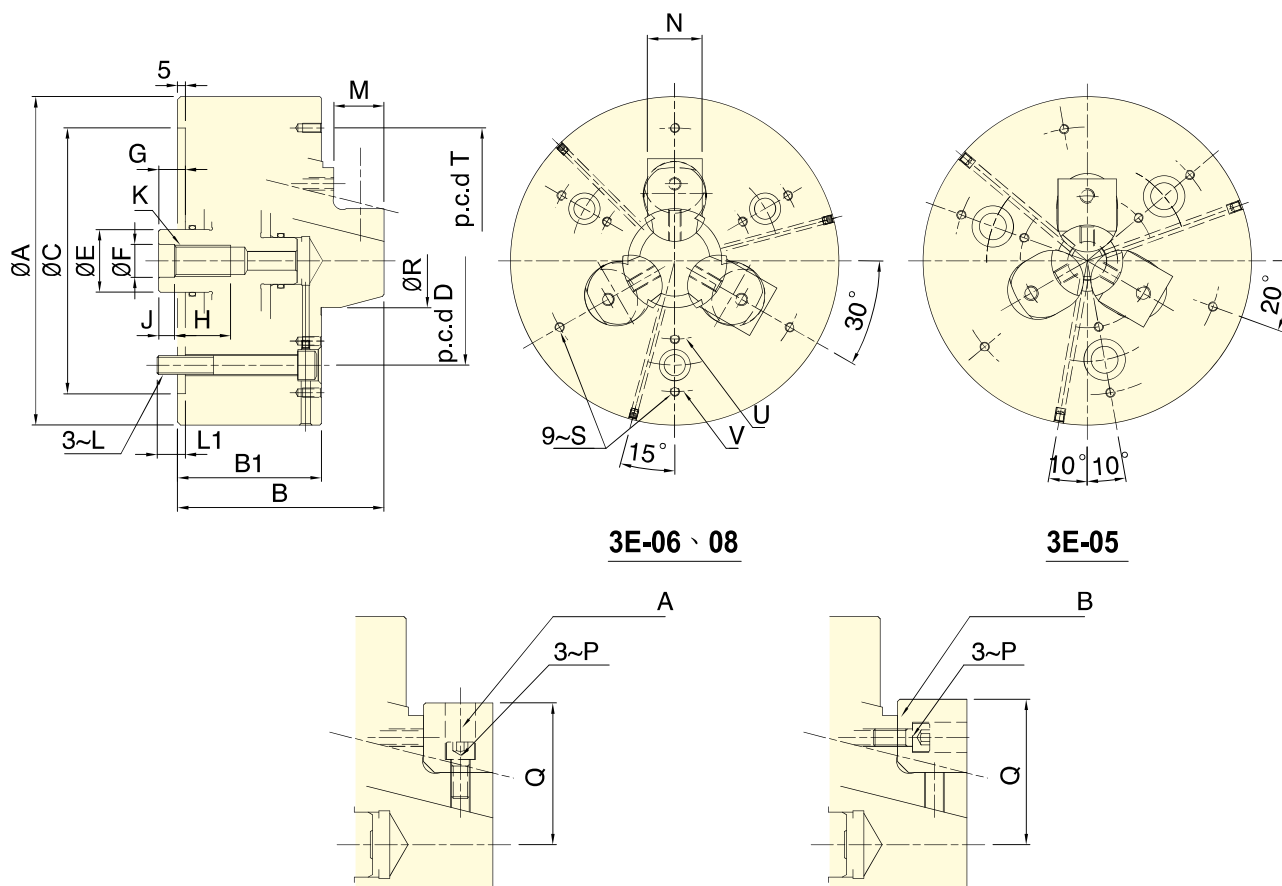

Subject to technical changes.

Spec. Model	Plunger stroke mm	Jaw stroke(Dia.) mm	Chuck Dia,mm		Max. D.B. pull kN(kgf)	Max. clamping force kN(kgf)	Max. speed min ⁻¹ (r.p.m)	I kg-m ²	Weight kg	Matching cyl.	Max. pressure Mpa (kgf/cm ²)
			Max.	Min.							
3E-05	6	3	50	29	13.0(1320)	42.0(4280)	6000	0.018	7.6	RK-100	1.8(18.5)
3E-06	10	5	70	44	18.0(1830)	57.9(5900)		0.043	13.9		2.5(25.6)
3E-08			95	65	25.0(2540)	80.0(8150)	5000	0.13	23.8	RK-125	2.2(22.5)

Size Model	A	B	B1	C (H6)	D	E	F (H8)	G _{max.}	G _{min.}	H	J	K
3E-05	135	98	72	110	82.6	25	18	18	12	25	8	M16
3E-06	165	112	80	140	104.8	35		22		30		
3E-08	210	132	92	170	133.4	40	21			36	10	M20

Size Model	L	L1	M	N	P	Qmax.	Qmin.	R	S	T	U	V
3E-05	M10	15	20	24	M6	34.45	32.95	25	M6x12	110	55	110
3E-06			23	30		46.95	44.45	40		130	76	134
3E-08			32	35	M8	66.5	64	60		170	100	167