Epefine






grinding

CONSTRUCTION

- + Electro-permanent multi-core magnetic system
- + Pole division 4/1 steel/brass
- + Rigid, solid body, watertight assembly
- + Nominal holding force: 100 N/cm²

| Model | W [mm] | L [mm] | H [mm] | Weight [kg] |
|-------------|------------------|-----------|-----------|----------------|
| EPEF200400 | 200 | 400 | 80 | 33 |
| EPEF250500 | 250 | 500 | 80 | 50 |
| EPEF300600 | 300 | 600 | 80 | 75 |
| EPEF400800 | 400 | 800 | 80 | 135 |
| EPEF3001000 | 300 | 1000 | 80 | 125 |
| EPEF5001000 | 500 | 1000 | 80 | 210 |
| EPEF6001000 | 600 | 1000 | 80 | 254 |

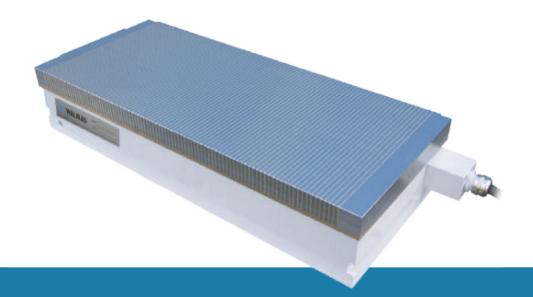

APPLICATION

- + Medium to high precision grinding operations of a wide range of workpiece sizes
- + Recommended minimum component size: 36 x 10 x 2 mm
- + EP technology avoids heating and expansion of the workpiece

SCOPE OF SUPPLY

- Back and end sto
- Set of clamp
- + Power cord of 3 r

SUITABLE CONTROL UNIT

- Consult with us a suitable control unit and electrical connection
- + For more information, refer to the section **control units on pg. 33.**

