

Neomill compact




Surface grinding



Milling

CONSTRUCTION

- + Solid top plate machined out of a single piece of steel
- + Top plate 100% waterproof
- + Maximum holding force 160 N/cm² right up to the edges of the chuck
- + Very low residual magnetism after switching off
- + Increased top plate life (usability) of 10 mm, checkpoints in the pole plate, indicate time for replacement

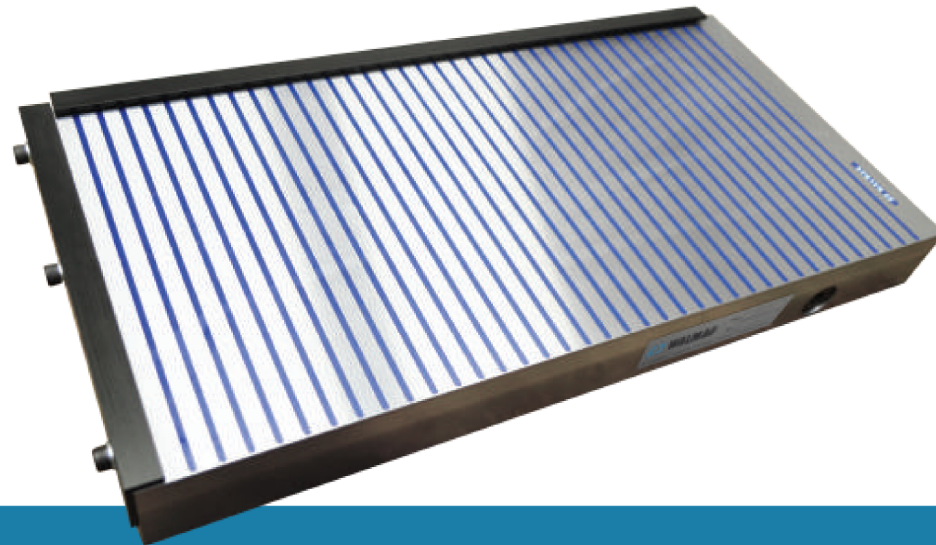

| Model | Pole pitch | W [mm] | L [mm] | H [mm] | Weight [kg] |
|-------------|------------|--------|--------|--------|-------------|
| NEOMC150250 | T15 11+4 | 150 | 250 | 50 | 14 |
| NEOMC150300 | T15 11+4 | 150 | 300 | 50 | 17 |
| NEOMC150350 | T15 11+4 | 150 | 350 | 50 | 20 |
| NEOMC150450 | T15 11+4 | 150 | 450 | 50 | 25 |
| NEOMC200300 | T15 11+4 | 200 | 300 | 55 | 25 |
| NEOMC200400 | T15 11+4 | 200 | 400 | 55 | 33 |
| NEOMC200450 | T15 11+4 | 200 | 450 | 55 | 37 |
| NEOMC200500 | T15 11+4 | 200 | 500 | 55 | 41 |
| NEOMC200600 | T15 11+4 | 200 | 600 | 55 | 49 |
| NEOMC240240 | T15 11+4 | 240 | 240 | 48 | 21 |
| NEOMC250400 | T15 11+4 | 250 | 400 | 60 | 45 |
| NEOMC250500 | T15 11+4 | 250 | 500 | 60 | 56 |
| NEOMC250600 | T15 11+4 | 250 | 600 | 60 | 67 |
| NEOMC280280 | T15 11+4 | 280 | 280 | 48 | 28 |
| NEOMC300300 | T15 11+4 | 300 | 300 | 60 | 40 |
| NEOMC300500 | T15 11+4 | 300 | 500 | 60 | 67 |
| NEOMC300600 | T15 11+4 | 300 | 600 | 60 | 81 |
| NEOMC320320 | T15 11+4 | 320 | 320 | 48 | 37 |
| NEOMC400400 | T15 11+4 | 400 | 400 | 48 | 57 |

APPLICATIONS

- + Milling
- + Drilling
- + Planing
- + Heavy grinding
- + Recommended minimum workpiece size: 15 x 15 x 6 mm

SCOPE OF SUPPLY

- + Back and end stop
- + Set of clamps
- + Allen key

