


# Neospark



EDM

## CONSTRUCTION

- + Solid top plate with transverse poles, pole division 1.4 mm steel and 0.5 mm brass
- + Life span (regrinding limit): 7 mm
- + Dual Neodymium magnetic system; nominal holding force: 100 N/cm<sup>2</sup>
- + Solid steel base with integrated actuating mechanism
- + Waterproof assembly

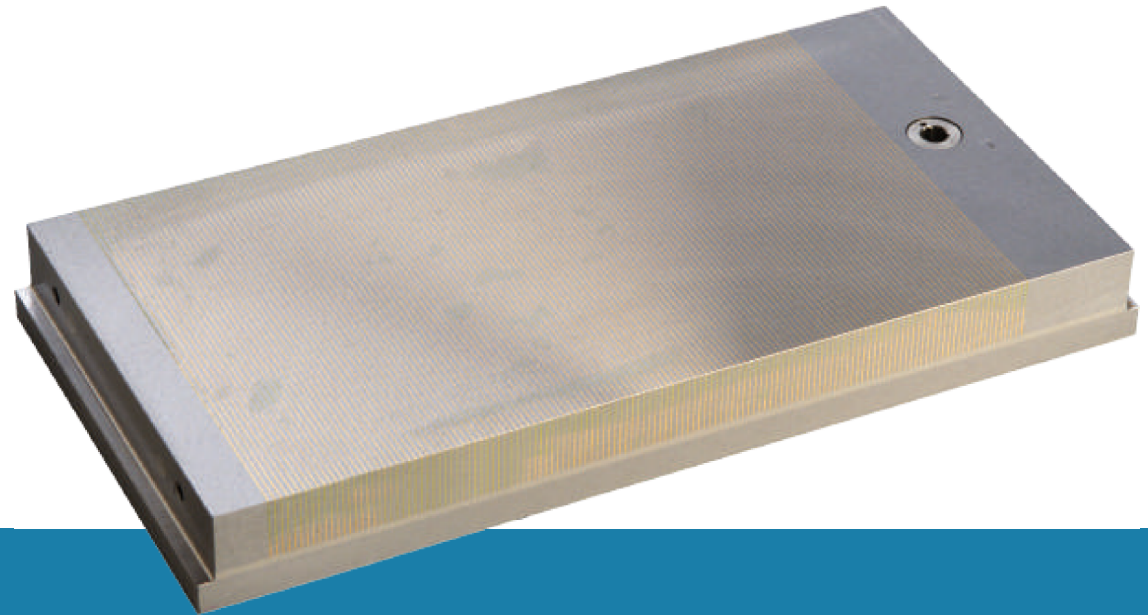

## APPLICATION

- + EDM, possible to submerge in dielectric liquid
- + Precision grinding of very small and thin up to large components

## SCOPE OF SUPPLY

- + Set of clamps
- + Allen key

| Model      | W<br>[mm] | L<br>[mm] | C<br>[mm] | H<br>[mm] | Weight<br>[kg] |
|------------|-----------|-----------|-----------|-----------|----------------|
| NEOK100175 | 100       | 175       | 120       | 32        | 5              |
| NEOK130255 | 130       | 255       | 200       | 32        | 9              |
| NEOK150150 | 150       | 150       | 95        | 35        | 7              |
| NEOK150300 | 150       | 300       | 245       | 35        | 13             |
| NEOK150350 | 150       | 350       | 295       | 35        | 15             |
| NEOK150450 | 150       | 450       | 395       | 35        | 19             |
| NEOK200400 | 200       | 400       | 342       | 35        | 23             |

